

Floating pumps

Uses:


Fill tanks from external natural water sources

Pumping water in flooded areas

Agriculture

Construction site

Performances	EFP-800BS-FL	EFP-1200BS-FL
Max. flow	1 080 l/min	1 309 l/min
Total head	18 m	18 m
Discharge connection	2"	2,5"
Engine	Briggs & Stratton 850 Series	Briggs & Stratton 850 Series
Engine power	4.1 kW / 5.5 HP	4.1 kW / 5.5 HP
Fuel tank capacity	1 l	1 l
Fuel	unleaded petrol (BA 95)	unleaded petrol (BA 95)
Float dimensions (L x W x H)	730 x 610 x 200 mm	730 x 610 x 200 mm
Device dimensions (L x W x H)	780 x 610 x 395 mm	780 x 610 x 395 mm
Dry weight (empty)	24,1 kg	24,6 kg

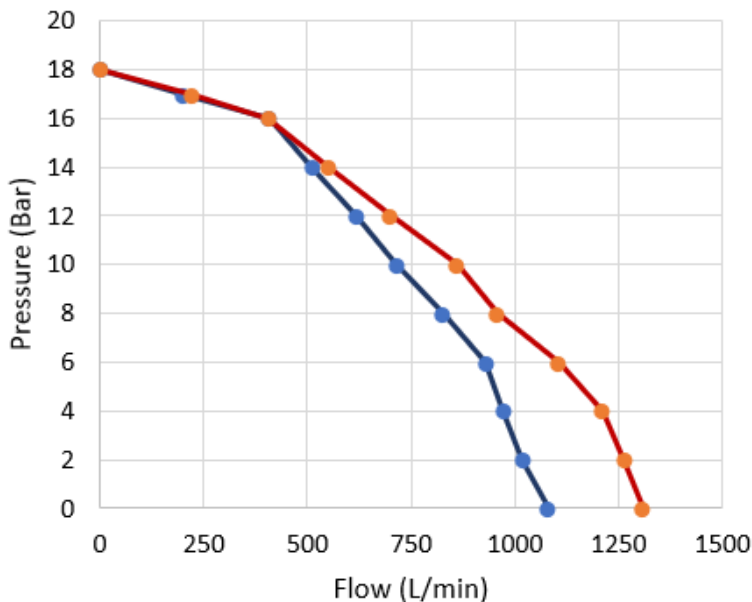

—●— EFP-800BS-FL
—●— EFP-1200BS-FL

Pompes flottantes

Utilisations:


Remplir des réservoirs depuis des sources d'eaux extérieurs

Pomper de l'eau dans des zones inondées

Agriculture

Travaux

Performances	EFP-800BS-FL	EFP-1200BS-FL
Débit max	1 080 l/min	1 309 l/min
Hauteur max	18 m	18 m
Refoulement	2"	2,5"
Moteur	Briggs & Stratton 850 Series	Briggs & Stratton 850 Series
Puissance	4.1 kW / 5.5 HP	4.1 kW / 5.5 HP
Réservoir de carburant	1 l	1 l
Carburant	Essence	Essence
Dimensions flotteur (L x W x H)	730 x 610 x 200 mm	730 x 610 x 200 mm
Dimensions totales (L x W x H)	780 x 610 x 395 mm	780 x 610 x 395 mm
Poids à vide	24,1 kg	24,6 kg

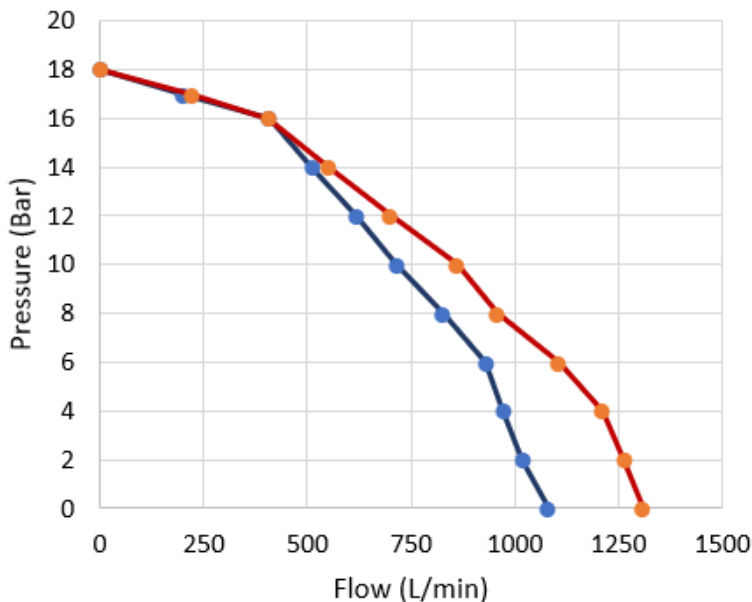

● EFP-800BS-FL
● EFP-1200BS-FL