



Motopompe incendie diesel

Modèle : EFP-2000-8D

Description :

Corps en alliage léger résistant à la corrosion

Traitement thermique



Amorçage par système d'éjecteur d'échappement actionné manuellement

Roulement en acier inoxydable

Affichage numérique indiquant les niveaux, le régime ect.

Dimensions en mm : Long 1050 / Larg 630 / haut 745

Caractéristiques	Moteur
Modèle	DV6D 1.6L
Carburant	Diesel
Puissance	68kW
Cylindrée	4
Refroidissement	À air
Démarrreur	Electrique
Réservoir	32 L
Caractéristiques	Pompe
Type	Centrifuge
Amorçage	Manuel
Autonomie	2 heures
Diam raccord aspiration	4"
Diam raccord refoulement	2" 1/2
Performance	Pompe
4 bars	2.200 l/min
6 bars	2.100 l/min
7 bars	2.00 l/min
10 bar	700 l/min

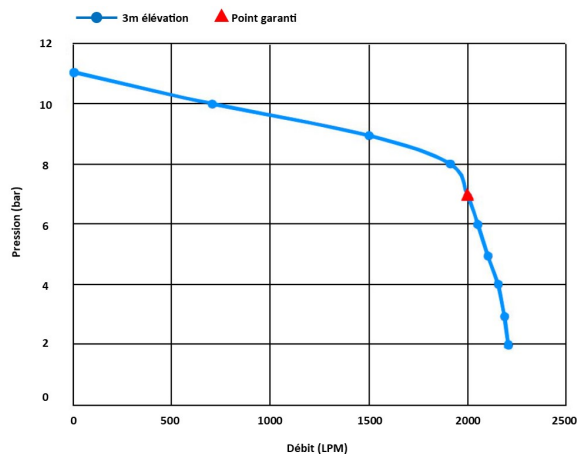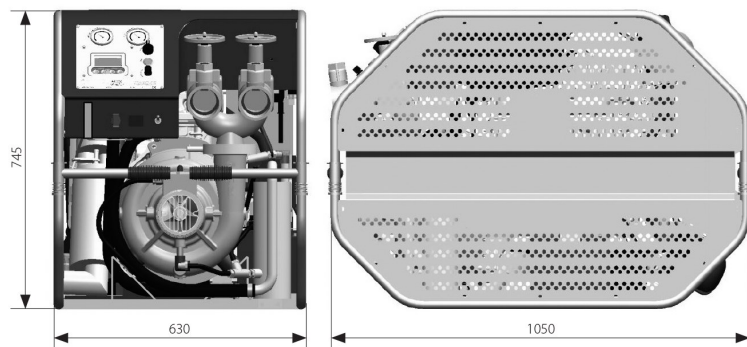



Diesel Pump incendie

Model : EFP-2000-8D

Description :

Corrosion resistant light alloy body

Heat treatment

Priming by manually operated exhaust ejector system

Stainless steel bearing

Digital display showing levels, speed, etc.

Dimensions in mm: Length 1050 / Width 630 / Height 745

Specifications	Engine
Model	DV6D 1.6L
Fuel	Diesel
Power	68kW
Cylinder	4
Cooling	À air
Strater	Electric
Tank	32 L
Specifications	Pump
Type	Centrifuge
Priming	Manual
Autonomy	2 hours
Suction connection diameter	4"
Discharge connection diameter	2" 1/2
Performance	Pump
4 bars	2.200 l/min
6 bars	2.100 l/min
7 bars	2.00 l/min
10 bar	700 l/min

