



Motopompe incendie avec amorçage par échappement

Modèle : EFP-600-7

Caractéristiques	Moteur
Carburant	Essence
Modèle	Briggs & Stratton - 2 cylindres « V »
Puissance	18 CV
Démarrreur	Electrique 12V + manuel d'urgence
Réservoir	9 litres
Performances	Pompe
2 bars	1200 l/min
5 bars	900 l/min
7 bars	600 l/min
8 bars	400 l/min
Caractéristiques	Pompe
Amorçage	Par échappement
Deux vannes de sortie	2½
Diamètre aspiration	4"
Cadre pompe	Acier inoxydable grade 304
Corps	Alliage léger qualité 6061
Roue	Traitée thermiquement à T6
Dimensions	623 x 500 x 600
Poids à sec	74 kg

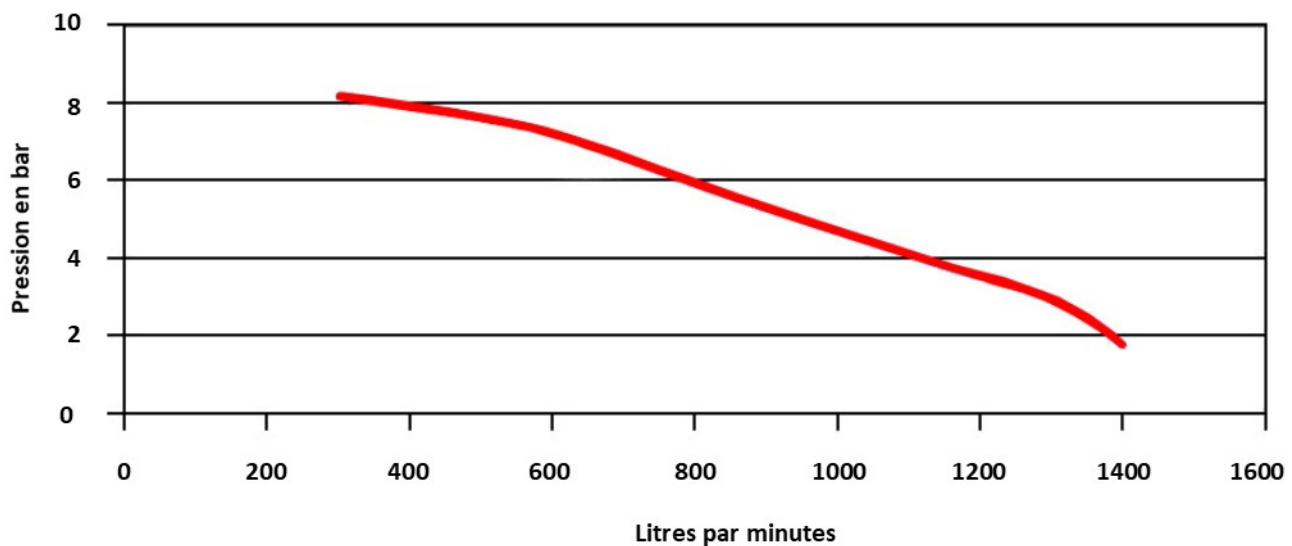

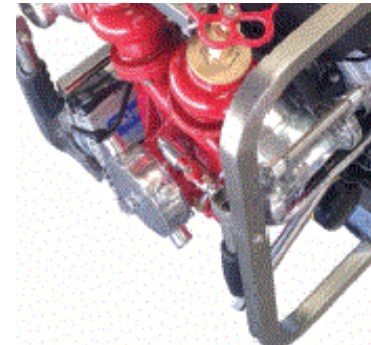

Fire-fighting motor pump with exhaust priming

Model : EFP-600-7

Caractéristiques	Engine
Fuel	Petrol
Model	Briggs & Stratton - 2 cylindres « V »
Power	18 CV
Sarter	Electric 12V + emergency manual
Tank	9 liters
Performances	Pump
2 bars	1200 l/min
5 bars	900 l/min
7 bars	600 l/min
8 bars	400 l/min
Characteristics	Pump
Priming	By exhaust
Two outlet valves	2½
Suction diameter	4"
Pump frame	Grade 304 stainless steel
Pump body	Light alloy quality 6061
Wheel	Heat-treated at T6
Dimensions	623 x 500 x 600
Dry weight	74 kg

