




Self-priming electric pump with generator on road trailer

EFP-550-22

HMT	Flow
22 m	550 m ³ /h

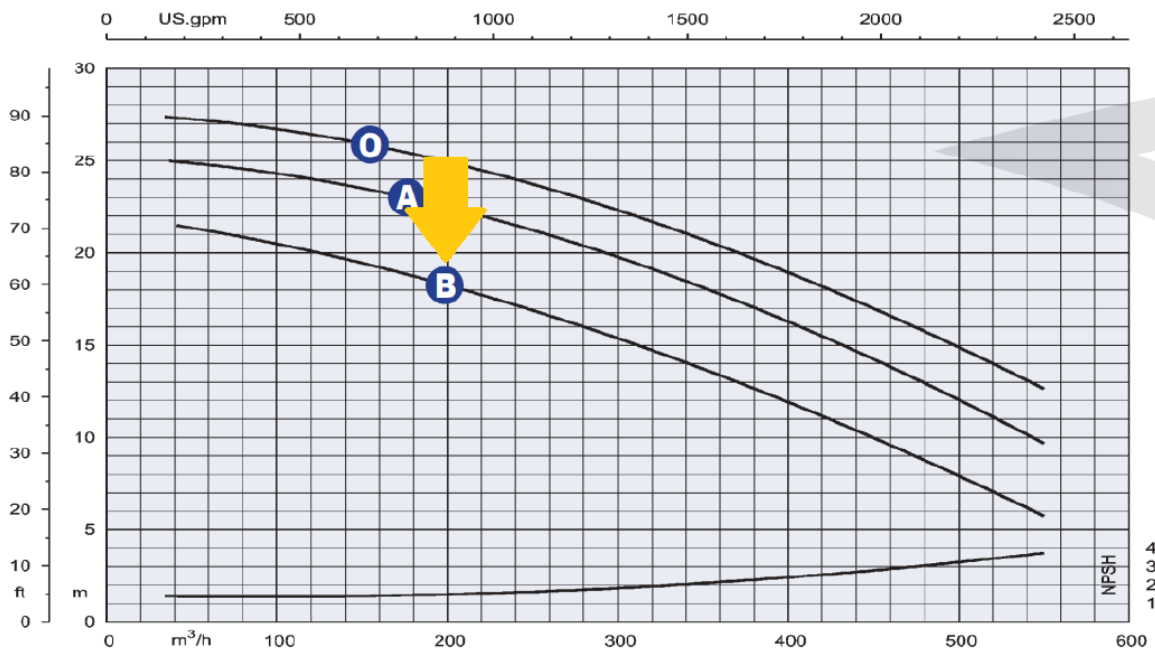

Characteristics

Electricpump	
Type	Self priming
Power	22kW @1450 rpm
Max flow	550 m ³ /h
HMT max	22 m
Solid passage	75 x 78 mm
Inlet / outlet	DN200 / DN200
Body	Cast iron
Impeller	Cast iron
Electric engine	22kW—50Hz
Type	Triphasé—Self ventilated


Generator—Green power	
Diesel engine	KHOLER
Power	4 cyl—64HP—2482 cc
Speed	1500
Power	33kW (44CV)
Emissions	Stage V
Cooling	Liquid
Fuel tank	120L



Pompe électrique auto-amorçant avec groupe électrogène sur remorque routière

EFP-550-22

HMT	Débit
22 m	550 m ³ /h

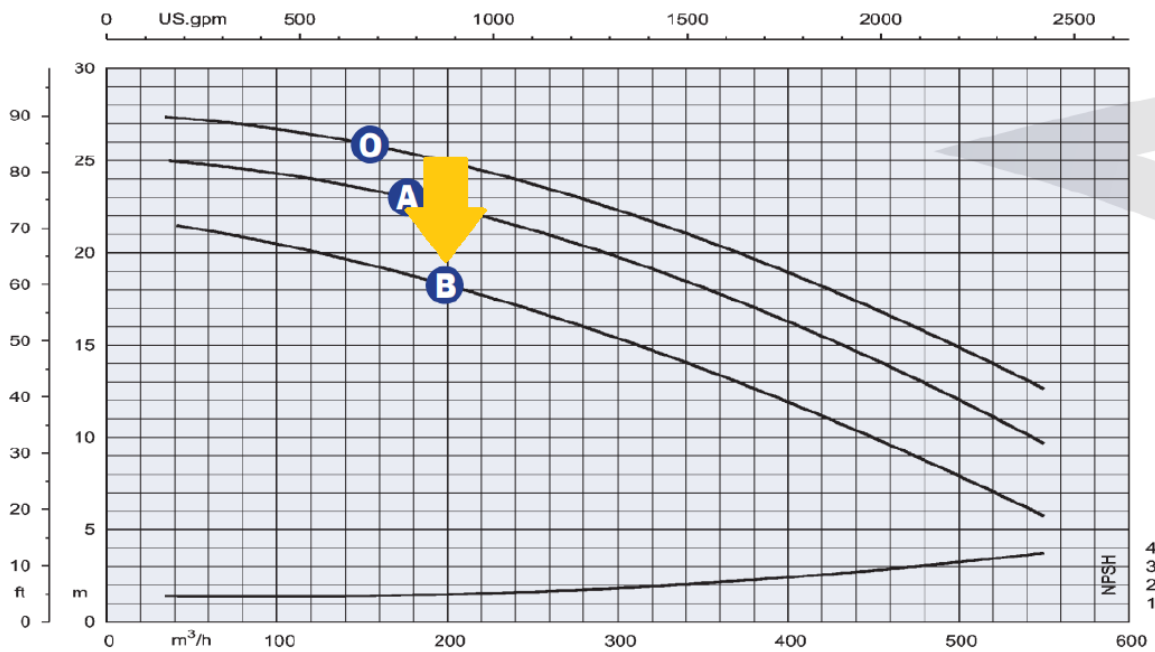

Caractéristiques

Electropompe	
Type	Auto-amorçante
Puissance	22kW @1450 rpm
Débit max	550 m ³ /h
HMT max	22 m
Passage libre	75 x 78 mm
Bride aspi / refoulement	DN200 / DN200
Corps de pompe	Fonte
Roue	Fonte
Moteur électrique	22kW—50Hz
Type	Triphasé—Autoventilé

Groupe électrogène—Green power	
Moteur diesel	KHOLER
Puissance	4 cyl—64HP—2482 cc
Vitesse	1500
Puissance	33kW (44CV)
Emissions	Stage V
Refroidissement	Par liquide
Réservoir	120L