

Groupe motopompe incendie


EFP-60-10

HMT	Débit Motopompe
100m	60m ³ /h

Montage pompe :



+



Caractéristiques

Moteur Perkins	404D-22T
Carburant	Diesel
Réservoir	450 L
Puissance	41.5kW @2800 rpm
Emissions	EU Stage IIIA

Pompe ROVATTI	F43K80/3G
Type	Centrifuge
Corps de pompe	Fonte
Roue	Fonte
Arbre	Acier
Vitesse	2300 rpm
Puissance	23.5 kW
Rendement	69.6%
Débit max	82.6 m ³ /h

Options incluses	
Amorçage	Super Tank
Version	Crochet de levage
Configuration	Super Silent
Panneau de commande	ELCOS CIM250

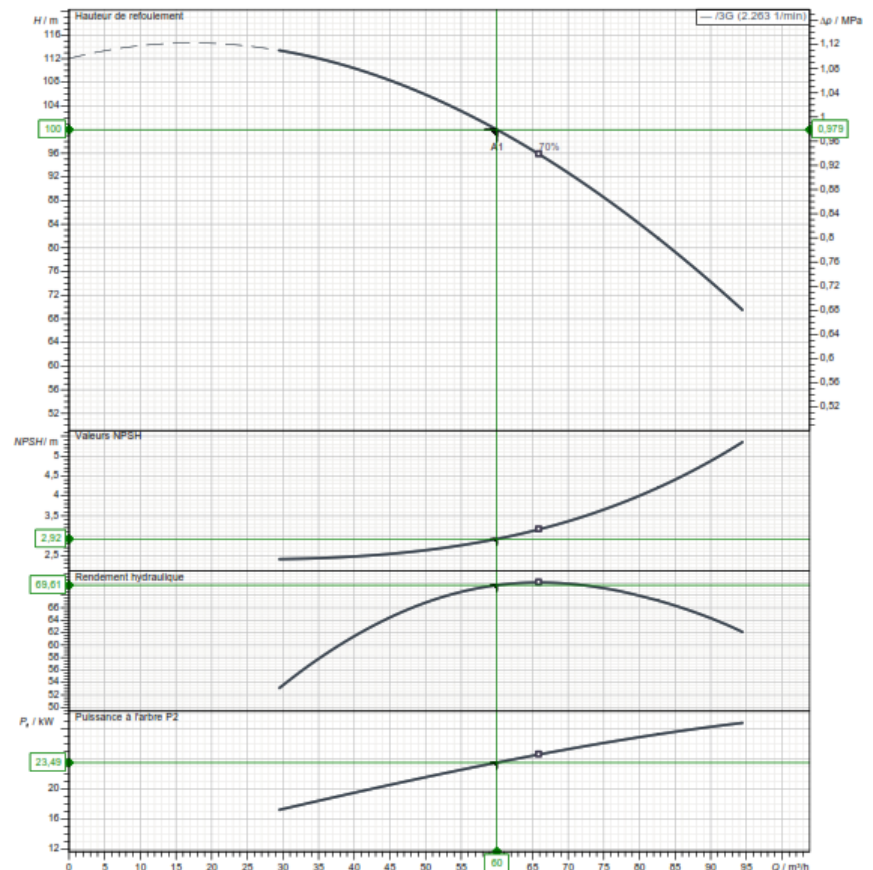



Photo non contractuelle

Diesel fire pump unit

EFP-60-10

HMT	Flow
100m	60m ³ /h

Configuration :

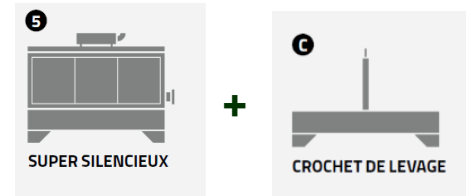


Caracteristics

Perkins engine	404D-22T
Fuel type	Diesel
Fuel tank capacity	450 L
Power	41.5kW @2800 rpm
Emissions	EU Stage IIIA

ROVATTI pump	F43K80/4E
Type	Centrifugal
Pump body	Cast iron
Impeller	Cast iron
Shaft	Steel
Speed	2300 rpm
Power	22 kW
Efficiency	69.6%
Max flow	82.6 m ³ /h

Included options	
Priming	Super Tank
Version	Lifting Hook
Configuration	Super Silent
Control panel	ELCOS CIM250

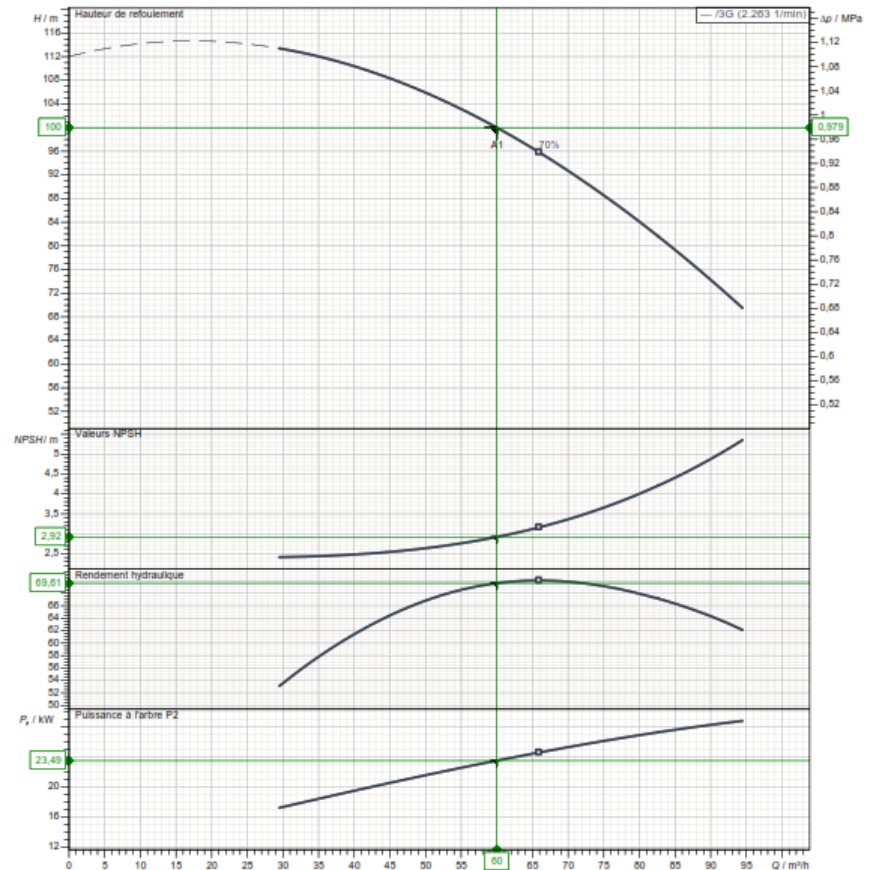

Non contractual photo