


Electropompe de drainage triphasée grosse granulométrie

Référence : EFP-4920R400

Description :

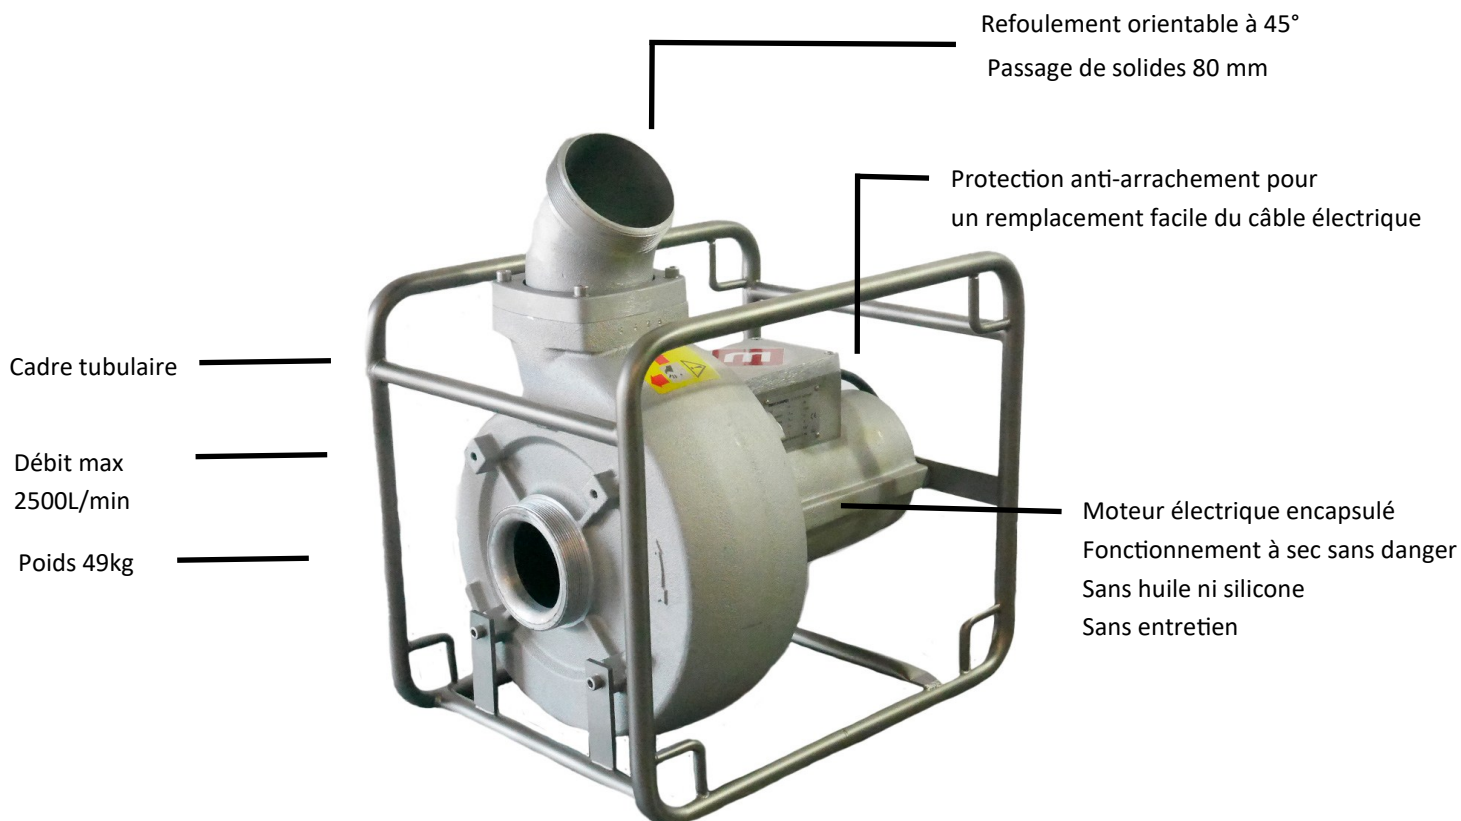

Caractéristiques	Pompe
Moteur	3ph 400v 50hz
Puissance	2.9 / 2.3kw
Courant nominal	5.2 Amps
Vitesse de rotation	1450 tr/min
Aspiration	4"
Refolement	
Câble	H 07 RN-F 4G1.5 (20m)
Connecteur	CEE 16A
	Interrupteur on/off IP45
Dimensions	50 x 36 x 58 cm
Poids	49 kg

- Protection complète du moteur
- Sens de rotation automatique
- Protection contre les surcharges
- Protection contre les sous-tensions
- Protection contre les défaillances de phase
- Surveillance des joints mécaniques
- Verrouillage de sécurité pour redémarrage automatique
- Pompage de niveau bas par inclinaison à 90° aucun accessoire requis


Débits L/min	Hauteur de refolement
2500	0
1920	5
1300	7
700	10
0	14



Three-phase drainage electropump with large solid

Reference code : EFP-4920R400

Description :

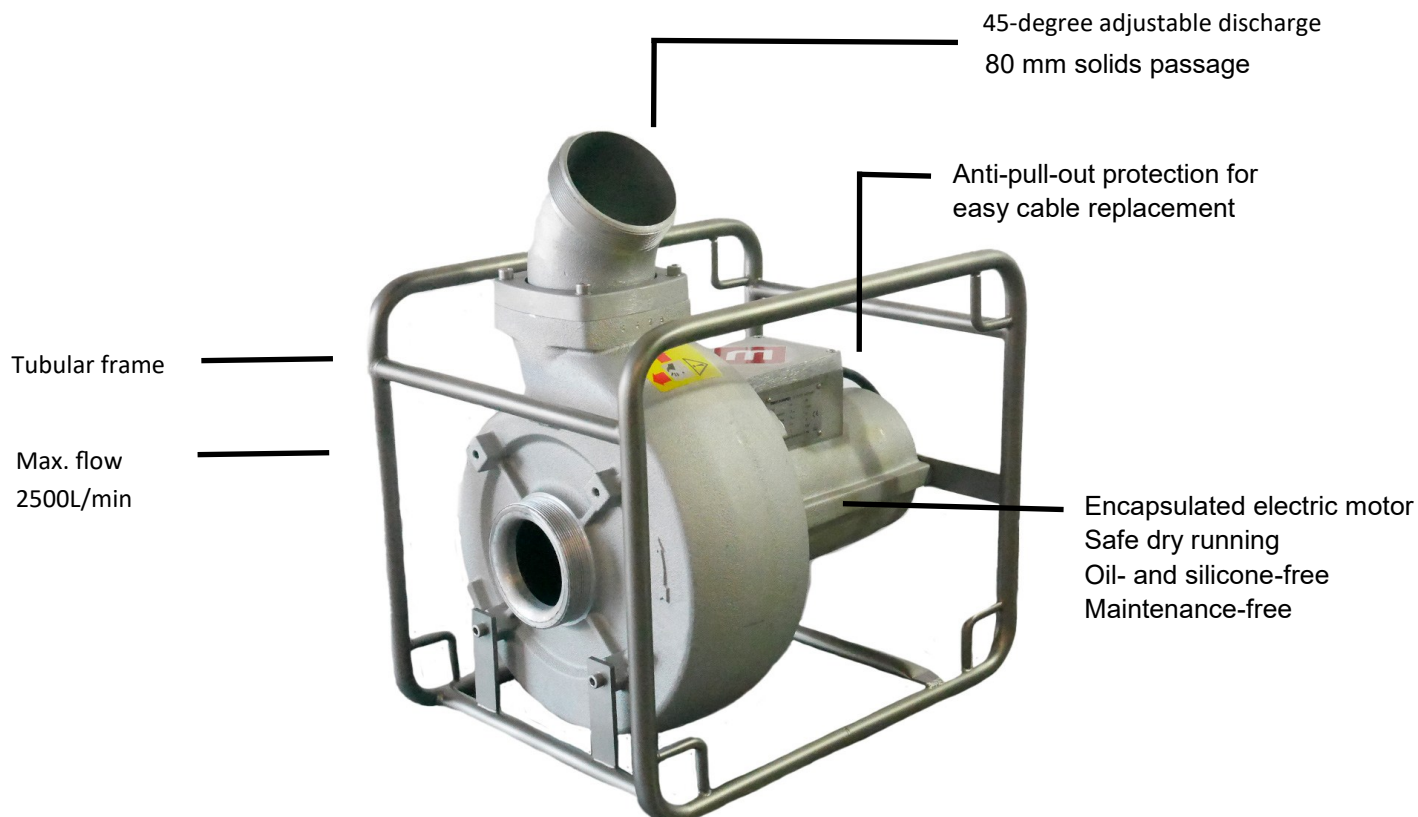

Features	Pump
Engine	3ph 400v 50hz
Power	2.9 / 2.3kw
Rated current	5.2 Amps
Rotation speed	1450 trmin
Suction	4"
Discharge	
Cable	H 07 RN-F 4G1.5 (20m)
Connector	CEE 16A Interrupteur on/off IP45
Dimensions	50 x 36 x 58 cm
Weight	49 kg

Flow L/min	Discharge height
2500	0
1920	5
1300	7
700	10
0	14

- Complete motor protection
- Automatic direction of rotation
- Overload protection
- Undervoltage protection
- Phase failure protection
- Mechanical seal monitoring
- Safety interlock for automatic restart
- Low-level pumping by 90° tilt no accessories required

