



Motopompe Flottante 1250 l/min


Modèle : EFP-1250-FL-DE

Description :

- Motopompe flottante avec flotteur en polyéthylène résistant.
- Démarrage **électrique** et manuel de secours.
- Equipé d'un filtre en acier pour empêcher les débris d'endommager la pompe.
- Les poignées facilitent le transport et la manipulation de la pompe.
- La batterie externe permet le démarrage rapide de la motopompe et peut être utilisé pour recharger d'autres appareils électroniques.



Caractéristiques	Pompe
Corps	Alliage Aluminium
Flotteur	Polyéthylène
Débit max	1258 l/min
Pression max	4.4 b
Performances	641 l/min @ 2b 372 l/min @ 3b 137 l/min @ 4b
Refoulement	2"1/2
Caractéristiques	Moteur
Moteur	Briggs&Stratton s 950
Puissance	5.1 kW / 6.6 CV
Capacité du réservoir	3.8 lt
Carburant	Essence
Démarrage	Manuel + Electrique
Dimensions	Poids
710 x 610 x 380 mm	26.5 kg

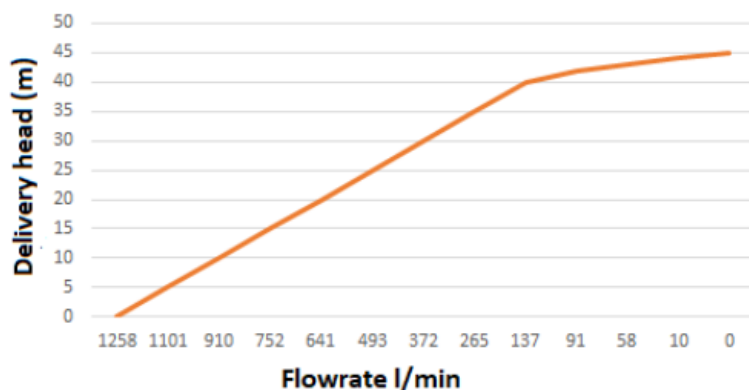



Floating Motorpump 1250 l/min

Model : EFP-1250-FL-DE

Description :

- Floating motorpump with resistant polyethylene float.
- Emergency manual and **electric start**.
- Equipped with a steel filter to prevent debris from damaging the pump.
- The handles facilitate transport and handling of the pump.
- The external battery allows quick starting of the motorpump and can be used to recharge other electronic devices. pump can run dry without damage.



Characteristics	Pump
Body	Aluminium Alloy
Float	Polyethylene
Débit max	1258 l/min
Max flow	4.4 b
Performances	641 l/min @ 2b 372 l/min @ 3b 137 l/min @ 4b
Delivery	2"1/2
Characteristics	Engine
Engine	Briggs&Stratton s 950
Power	5.1 kW / 6.6 CV
Fuel Tank	3.8 lt
Fuel	Essence
Starter	Manual + Electric
Dimensions	Weight
710 x 610 x 380 mm	26.5 kg

